



Model 2310HD

Super Bright 23" LCD Screen, HD Ready

All-weather enclosure protects internal components from rain, dirt, insects and scratches

Dual airflow system keeps unit cool and dry in temperatures up to 122 degrees F.

Internal thermostatically-controlled heater protects TV in temperatures as low as -24 degrees F.

Innovative watertight cable entry system with pass-through design keeps cables dry and allows for easy hook-ups


Optional wall mounts and deck planter poles are weatherized and include stainless steel hardware

Model 2310HD

LCD Screen	23-inch diagonal TFT Active Matrix
Resolution	1366 x 768 WXGA
Aspect Ratio	16:9
Active Area	508.1 x 285.7 mm
Contrast Ratio	700:1
Response Time	8 milliseconds
H/V Viewing Angle	160° by 140°
Display Colors	16.7 million
Input Connectors:	
RF	Antenna/CATV (NTSC, ATSC, QAM)
HDMI	HDMI Input x1/HDCP
Video Composite	S-Video x1 and Composite Video x1 L/R Audio Inputs x2
Video Component	YCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 567i, 576P, 720P and 1080i) and audio L/R channels x1
PC	15-pin D-sub VGA
Input Power	100-240 VAC, 50-60 Hz 130W
Audio	10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear cover
Operating Temp.	-24° to 122° F. (-31° to 50° C.) *
Non-op. Temp. (Off-mode with power applied)	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Water-resistant remote control with lithium battery Removable table stand
TV Dimensions	23.51 in. W x 16.27 in. H x 4.90 in. D
Weight	22 lbs.
Shipping Dimensions	30.31 in. W x 19.49 in. H x 8.86 in. D
Shipping Weight	28 lbs.
Warranty	One-year, in-factory, parts and labor

SunBriteTV Model 2310HD

(All dimensions are in inches)

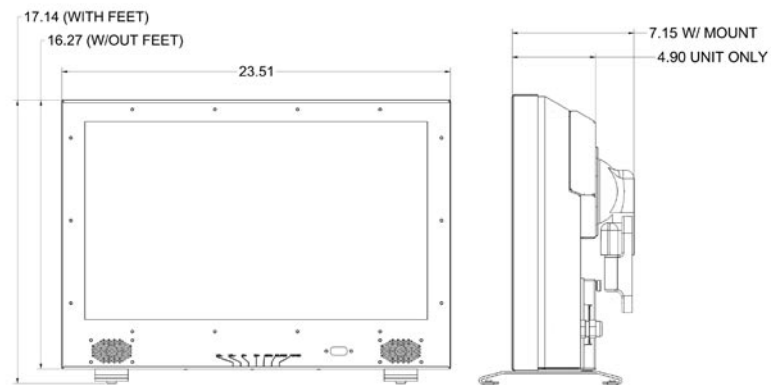

TV Dimensions are:

23.51 in. W x 16.27 in. H x 4.90 in. D

Height dimension with table stand is 17.14 in.

TV with optional wall mount measures 7.60 in. when folded flush against the wall.

SB-CM20	Ceiling mount with tilt and swivel includes adjustable extension column that provides 5" to 11" above unit to ceiling. Also includes 4" x 4" designer ceiling plate. Meets VESA standards.
SB-WM23	Articulating wall mount with tilt, swivel, pan and extends up to 9" from wall. Meets VESA standards.
SB-DP20X	Deck/Planter pole (requires purchase of wall mount). Special order item.
SB-FMT23	RadioFM™ transmits audio from TV to FM radio
SB-DC23	Outdoor TV dust cover

Specifications may be subject to change.

866.357.8688

www.sunbriteTV.com

5069 Maureen Lane • Moorpark, CA 93021

Patent pending. All rights reserved. (C) 2006 SunbriteTV LLC

*Temperature range is for operation in shaded location.



Model 3210HD

Super Bright 32" LCD HDTV Screen

All-weather enclosure protects internal components from rain, dirt, insects and scratches

Dual airflow system keeps unit cool and dry in temperatures up to 122 degrees F.

Internal thermostatically-controlled heater protects TV in temperatures as low as -24 degrees F.

Innovative watertight cable entry system with pass-through design keeps cables dry and allows for easy hook-ups


Optional wall mounts and deck planter poles are weatherized and include stainless steel hardware

Model 3210HD

Specifications

LCD Screen	32-inch diagonal TFT Active Matrix
Resolution	1366 x 768 WXGA
Aspect Ratio	16:9
Active Area	697.7 x 392.3 mm
Contrast Ratio	1600:1
Response Time	8 milliseconds
H/V Viewing Angle	178° by 178°
Display Colors	16.7 million
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC)
HDMI	HDMI Input x1
Video Composite	Dual S-Video x1 and Composite Video x1 L/R Audio Inputs x2
Video Component	YCbCr/YPbPr x1 (supports HDTV inputs at 480i, 480P, 720P and 1080i) and audio L/R channels x1
PC	15-pin D-sub VGA
RS232 Serial	1/8" stereo jack (discreet on/off and input-select)
Input Power	100-240 VAC, 50-60 Hz 170W
Audio	10-watt x 2 channels, water-resistant speakers L/R Audio output connector inside rear cover
Operating Temp.	-24° to 122° F. (-31° to 50° C.)
Non-op. Temp. (Off-mode with power applied)	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Universal water-resistant remote control with lithium battery Removable table stand
TV Dimensions	32.00 in. W x 22.07 in. H x 6.81 in. D
Weight	49.0 lbs.
Shipping Dimensions	37.0 in. W x 31.0 in. H x 11.7"D
Shipping Weight	57 lbs.
Warranty	One-year, in-factory, parts and labor

SunBriteTV Model 3210HD
(All dimensions are in inches)

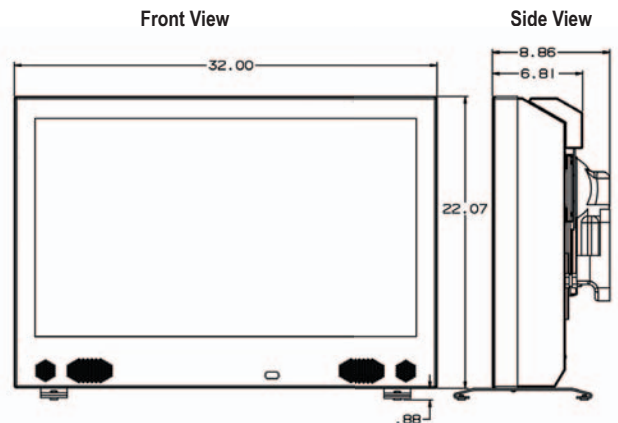

TV Dimensions are:
32.00 in. W x 22.07 in. H x 6.81 in. D
Height dimension with table stand is 22.95 in.
TV with optional wall mount measures 8.86 in. when folded flush against the wall.

Optional Accessories

SB-CM32A12	Ceiling mount with tilt and swivel. Includes adjustable extension column provides 3"-9" above unit to ceiling in 1" increments without disassembly, and 4" x 4" designer ceiling plate. Meets VESA standards.
SB-WM32	Articulating wall mount with tilt and swivel, and extends up to 11-7/8" from the wall. Meets VESA standards.
SB-DP32X	Deck/Planter pole (requires purchase of wall mount). Special order item.
SB-FMT32	RadioFM™ transmits audio from TV to FM radio
SB-DC321	Outdoor TV dust cover

866.357.8688

www.sunbriteTV.com

5069 Maureen Lane • Moorpark, CA 93021

Patent pending. All rights reserved. (C) 2007 SunbriteTV LLC



Model 4600HD shown without Detachable Speakers

LCD Screen	46-inch diagonal TFT Active Matrix
Resolution	1366 x 768 WXGA
Aspect Ratio	16:9
Pixel (Dot) Pitch	0.7455mm (H) x 0.2485mm (V)
Contrast Ratio	1600:1
Viewing Angle	178°
Response Time	8 milliseconds
Display Colors	16.7 million
TV formats	1080i HD, 720p HD, 480p DVD,, 480i standard TV
Input Connectors:	
RF	Antenna/CATV (ATSC/QAM/NTSC) x1
HDMI	HDMI™ Input with HDCP x2 (1 with Stereo Audio RCA)
Video Composite	S-Video x2 and Composite Video x2 L/R Audio Inputs x2
Video Component	YPbPr plus Stereo Audio x2
PC	15-pin D-sub VGA plus Stereo Audio
RS232 Serial	1/8" stereo jack (discreet on/off and input-select)
Input Power	100-240 VAC, 50-60 Hz 260W
Audio	10-watt x 2 channels, water-resistant speakers + 20W Sub (detachable); L/R Audio output
Outputs	5.1 Audio from DTV input only (SPDIF Optical) x1; Stereo Audio (RCA) x1; Headphone (Stereo Mini Jack) x1
Operating Temp.	-24° to 122° F. (-31° to 50° C.) *
Non-op. Temp. (Off-mode with power applied)	-24° to 140° F. (-31° to 60° C.) The non-operating temperature feature requires power to be applied
Accessories Included	Water-resistant Universal remote control with lithium battery Removable table stand
TV Dimensions	44.66" W x 27.16 "H (30.21"H with speakers, 30.54" H with speakers and table stand) x 6.85" D (11.70" D with base/table stand)
Weight	98 lbs.
Warranty	One-year, in-factory, parts and labor

Model 4600HD

Extra Bright 46" LCD Screen, HD-Ready

All-weather exterior protects internal components from rain, dirt, insects and scratches

Dual airflow system keeps unit cool and dry in temperatures up to 122 degrees F.


Internal thermostatically-controlled heater protects TV in temperatures as low as -24 degrees F.

Innovative watertight cable entry system with pass-through design keeps cables dry and allows for easy hook-ups

Detachable Speakers

Universal Remote Control

Optional wall mount is weatherized and includes stainless steel hardware

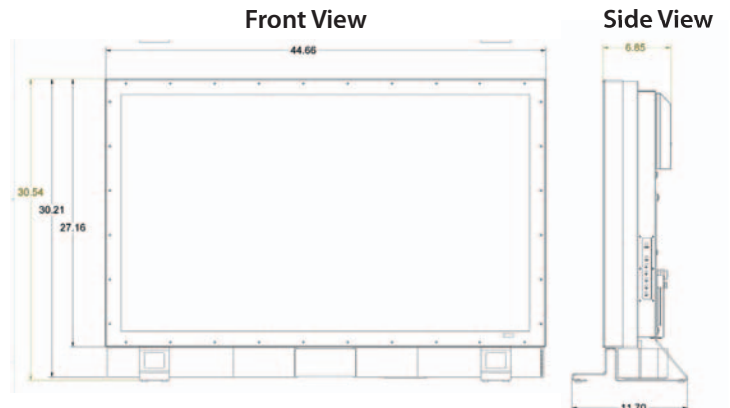

All measurements are in inches

Specifications may be subject to change.

*Temperature range is for operation in shaded location.

866.357.8688

www.sunbriteTV.com

5069 Maureen Lane • Moorpark, CA 93021

Patent pending. All rights reserved. (C) 2007 SunbriteTV LLC

**Press Release
For Immediate Release**

Contact:
Pat Caminiti
Mar-Com Plus
805.492.5870
marcomplus@adelphia.net

Lynn Stearn
SunBriteTV
805.222.2288
lstearn@sunbritev.com

Photos of SunbriteTV can be downloaded from the
Press Page of the website at www.sunbritev.com

**SunBriteTV
Transforms a Hot Tub
Into an Outdoor Home Theater
With RadioFM**

Moorpark, CA, July 19, 2006—Imagine this! Spa and hot tub owners can now soak and relax while enjoying their favorite television show *in surround-sound*, thanks to SunBriteTV's all-weather outdoor televisions and the new RadioFM™ wireless transmitter that was released today.

"Spa owners are a prime market for our all-weather outdoor televisions," says Lynn Stearn, Vice President of Sales for SunBriteTV, "however, the noise from the spa may compete with the audio from the television. Our RadioFM solution brings the audio from the TV, right to the spa."

SunBriteTV's RadioFM is a wireless transmitter that, when installed into the SunBriteTV television, sends the audio from the TV to the FM radio stereo system in the spa. This allows the audio to be played through the spa's built-in speakers. The TV and transmitter can be installed up to 30 feet from the FM radio.

"RadioFM is designed to work with most FM radio systems," says Stearn, "so if a spa doesn't have a built-in system, a portable FM radio system can be used to deliver the sound to the spa area."

SunBriteTV all-weather outdoor televisions are designed for permanent outdoor installation. The exterior is a corrosion-resistant, powder-coated aluminum enclosure that protects the internal TV components from outdoor elements. The display is protected by a anti-reflective, impact- and scratch-resistant window built into the enclosure. The speakers and user-friendly operating controls are also sealed against rain and moisture.

The TV's are protected from extreme climate conditions with a baffled and filtered, dual-fan airflow system that quietly keeps the unit cool in temperatures up to 122°. In cold climates, the internal thermostatically-controlled heater activates automatically when the TV's internal temperature dips to 32°F. The heater provides a 20°F temperature rise, allowing the TV to safely remain outdoors in temperatures as low as -24° F.

The innovative watertight cable entry system accepts nearly all video sources, including off-the-air antenna, cable TV, satellite TV, DVD players and PCs. The pass-through design ensures quick and easy hook-up.

Currently, there are two SunBriteTV all-weather outdoor LCD models. Model 3200HD-Pro is a 32" HD-ready LCD TV that projects a 1366 x 768 pixel image, 800 nits of brightness, and a 1200:1 contrast ratio.

Model 2010A-Pro is a 20" LCD TV that projects a super bright, 800 x 600 pixel image with 16.7 million colors and boasts 1000 nits of brightness and 500:1 contrast ratio. Both units are shipped with SunBriteTV's new water-resistant remotes with long-life lithium batteries.

SunBriteTV also offers several mounting options that provide optimum viewing selections. The articulating wall mount allows for horizontal extension, lateral rotation, tilt and swivel functions. For additional placement choices, a deck/planter pole mount is also available. The pole can be set in concrete, or bolted directly to a flat surface such as a patio or pool deck. The pole and supporting flange are made from heavy-gauge aluminum and are powder-coated to eliminate corrosion. Complete with the articulating mount, users have virtually unlimited viewing options.

SunBriteTV offers a one-year, in-factory, parts and labor warranty with both models. Model 3200HD-Pro has an MSRP of \$4495 and Model 2010A-Pro has an MSRP of \$2495. The MSRP for FM Radio is \$135.

SunBriteTV products are offered through a network of spa and hot tub retailers and on-line authorized dealers. To find a dealer near you, visit www.sunbritev.com or call 888.676.2288. SunBriteTV LLC is located in Moorpark, California.